





## 4 in 1 Autofocus 4MP Indoor / Outdoor IR Bullet

### IV-BV742W4MP-FH-AF

#### Features:

- . 4MP@TVI/CVI/AHD/CVBS video output
- . 1/2.7" CMOS
- . IR LED: 4pcs
- . IR distance: 164ft (50m)
- . Lens: 2.7-13.5mm
- . AGC, AWB, AES
- . DC 12V, IP66

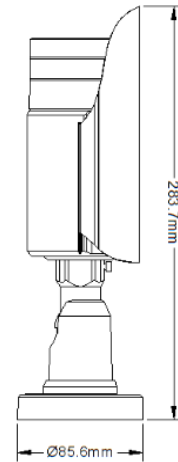

Junction Box (optional)  
IV-JBK02W



#### Use the OSD joystick to switch among the four video output modes:

- \* Push the joystick "UP" button key over 5 seconds to CVI mode
- \* Push the joystick "DOWN" button key over 5 seconds to TVI mode
- \* Push the joystick "LEFT" button key over 5 seconds to CVBS (Analog 960H) mode
- \* Push the joystick "RIGHT" button key over 5 seconds to AHD mode
- \*\* Each Boot up allows one video mode selection.

if you need to switch to another mode, you will need to reboot again.

Specification	IV-BV742W4MP-FH-AF
Horizontal Resolution	4MP@ TVI / CVI / AHD / CVBS
Image Sensor	1/2.7" CMOS
Signal System	NTSC/PAL
Effective Pixels	2592 (H) × 1520 (V)
Min. Illumination	0 lux(IR ON)
Synchronization	Internal synchronization
Video Output	CVI, TVI, AHD (4MP@25fps, 4M0P@30fps) Analog (2592 x 1520)
S/N Ratio	41dB(AGC OFF)
NR	2D/3D DNR
Shutter	Auto
Day&Night	Smart / Color / B&W
White Balance	Auto / Manual
OSD	English / Chinese / Traditional Chinese / Russian / Spanish / Italian / Fancais / Polskim / Portuguese / Japanese
AGC	Auto
IR LED	4pcs IR Array
Lens	2.7-13.5mm Auto Focus
IR Range	164ft (50m)
Power Supply	DC12V±10%
Power Consumption	< 6.5W
Weight	870g
IP Rating	IP66
Storage Temperature	-4°F ~ 140°F (-20°C ~ 60°C)
Working Temperature/Humidity	14°F ~ 140°F (-10°C ~ 60°C)
Working Humidity	Humidity 90% or less (non-condensing)