



## 5MP 4 in 1 Vandal Proof Indoor/ Outdoor Eyeball Dome

IV-DE28125MP-FH

**Features:**


- . 5.0MP 4-in-1 camera (HD-TVI/AHD/CVI/CVBS)
- . 5.0MP@TVI/AHD & 4.0MP @ CVI & CVBS video output
- . Varifocal lens 2.8~12mm
- . 24pcs IR LEDs, IR distance: 98 ~ 131ft
- . Support ICR switch, 2D-DNR, Day/night, D-WDR
- . DC 12V IP66



**Use the OSD joystick to switch among the four video output modes:**

Select your video protocol by switching the positions of the toggle switches per the below diagram.

The toggle switches are located at the end of the camera cable

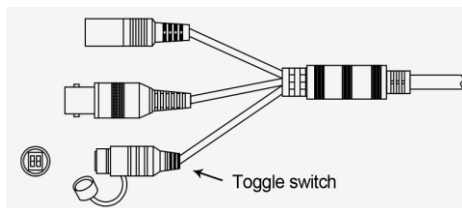

Specification	IV-DE28125MP-FH
Horizontal Resolution	5MP@ TVI/AHD & 4MP@ CVI & CVBS
Image Sensor	1/2.5" CMOS
Signal System	PAL / NTSC
Effective Pixels	2592 x 1944
S/N Ratio	More than 52 dB
Lens	2.8-12mm
Electronic Shutter	AUTO/MANUAL /FLICKER
Min. Illumination	0.1Lux @F1.2 (AGC on) 0 Lux IR LED on
Synchronization	Internal synchronization
Video Output	TVI /AHD (5MP@25fps, 4MP /3MP/1080P@30fps); CVI (4MP@25fps, 3MP/1080P@30fps); Analog (1280x576, 1280x480)
Back Light	Off / HLC / BLC / WDR
DNR	Off / Low / Mid / High
Day / Night	EX / Auto / Color / B & W
UTC	Support
White Balance	Auto/Auto-ext/Preset/Manual
Privacy Mask	Off / 0~15 Zones
LED Wave Length	24pcs IR LED
IR Distance	98~131ft (30~40m)
Connector Video	BNC
LED Switch	AUTO
IP Rating	IP66
Video Output	TVI / CVI / AHD / CVBS
Power Supply	DC12V±10%
Power Consumption	3W (Max. 3.6W with IR cut filter on)
Weight	1.08lbs (490g)
IP Rating	IP66
Working Temperature/Humidity	-4°F ~ 122°F (-20°C ~ 50°C)
Working Humidity	Humidity 90% or less (non-condensing)
Dimension	Ø 4.75" X 3.75" (h)
Weight	1.65 lbs.