




# 4 in 1 5MP IR Eyeball Camera

IV-DEF288S5MP-FH

**Features:**

- . 1/2.7" BSI CMOS Sensor
- . 5MP @ TVI/CVI/AHD/CVBS
- . 2592 x 1920, 3.6mm lens
- . AGC, AWB, AES, 2D DNR, D-WDR
- . Multi Languages OSD Control from Recorder
- . 12 pcs IR LEDs, up to 82ft IR distance
- . DC12V

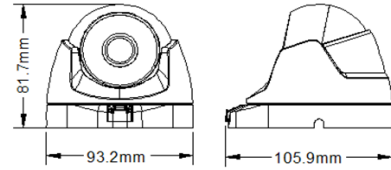

Junction Box  
IV-JBK01W (optional)

**HD CVI/HD TVI/AHD/ANALOG Output  
Selectable from Water Proof Toggle Switch**



SPECIFICATION	IV-DEF288S5MP-FH
Horizontal Resolution	5MP@ TVI / CVI / AHD / CVBS
Image Sensor	1/2.7"BSI CMOS Sensor
Signal System	NTSC/PAL
Effective Pixels	2592(H) x 1920(V)
Min. Illumination	0 Lux (IR on)
Synchronization	Internal synchronization
Video Output	CVI,TVI ,AHD (5MP@25fps, 5MP@30fps, 5MP@15fps, 1080P@25fps, 1080p@30fps) CVBS
S/N Ratio	35dB(AGC OFF)
NR	2D DNR
Shutter	Auto
Day&Night	Ext/Auto / Color / B&W
White Balance	Auto / Manual
OSD	English / Chinese/Traditional Chinese
AGC	Auto
IR LED	12pcs High power IR LED
Lens	3.6mm
IR Range	82ft (25m)
Power Supply	DC12V±10%
Power Consumption	< 4W
Weight	0.66lbs (300g)
IP Rating	IP66
Storage Temperature	-4°F ~ 140°F (-20°C ~ 60°C)
Working Temperature/Humidity	14°F ~ 140°F (-10°C ~60°C)
Working Humidity	Humidity 90% or less (non-condensing)