



2MP, 4X IP PTZ Camera


IV-IPPTZ2MP-4X

Features:

- . 2MegaPixels, 1/2.8" CMOS, 4X optical zoom; Resolution: 1920 x 1080
- . Support TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, UPnP Protocols
- . Support lightning protection, anti-surge, anti-surge function
- . 6PCS high-power infrared lights, no flashlight effect , IR distance 120~180 ft
- . 360°endless pan range and 0°- 90°tilt range, support auto-flip, non-surveillance blind area
- . Max. pan preset speed of 200°/s and max. tilt preset speed of 30°/s
- . Pan keyboard speed 0.6°~180°/s, tilt keyboard speed 3.5°~30°/s
- . Support 220 presets, support 8 patrols, each patrol can contain up to 32 presets
- . Support 4 patterns, can totally record up to 10 minus
- . Support scan between two presets, area limited
- . Support Proportional zoom function, rotation speed can be adjusted automatically according to zoom multiples
- . Support park action, presets/pattern/patrol/pan scan can invoke automatically after a defined time of inactivity
- . Outside weather-proof, IP66, wall mount included



Structure Dimension (Unit: mm):

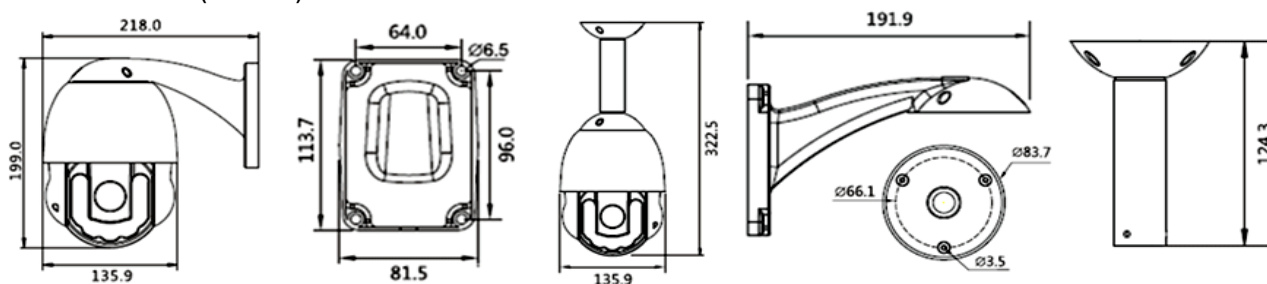

| Specification. | | IV-IPPTZ2MP-4X |
|-------------------------------|---|---|
| Camera Characteristics | | |
| Video | Sensor | 1/2.8"Ex-view 2 Mega Pixel CMOS |
| | Resolution | 1920X1080 |
| | Illumination | Color: 0.2Lux@F1.2 Black: 0.02Lux@F1.2 |
| | Shutter | Auto/manual (1/5~1/50000S) |
| Code | Video Compression | H.264/Mjpeg |
| | Output rate | 32Kbps-16Mbps, support main stream and sub-stream |
| | Frame rate | 25fps(1280*720) |
| Lens | Focus | 4.9-19.6mm |
| | Optical zoom | 4X |
| | View angle FOV(H) | 53.2°-5.65° (wide-angle lens) |
| | Min distance | 10mm(W)-1000mm(T) |
| Function | White balance | Auto/manual |
| | Mirror Image | Pan/tilt/pan+Tilt/off |
| | Day/night cut | Auto/manual |
| PTZ Characteristics | | |
| IR distance | 120~180 ft | |
| Pan range and speed | 360° endless, 0.6°-200°/s | |
| Tilt range and speed | 0-90°, support auto flip, 3.5-30°/s | |
| Manual speed | high.middle.low speed adjustable | |
| Port | | |
| Network | RJ45 10/100M self-adaption Ethernet interface | |
| Power supply | DC 12V/2A | |
| Others | | |
| Power Consumption | 20 (MAX) | |
| Working Temperature/Humidity | -4 °F~140°F (-20 °C~60 °C), ≤90%RH (frostless) | |
| Ingress Protection | IP66 | |
| Dimensions | 8.86" x 9.65" x 9.06" | |
| Weight | 4.76 lbs | |