





PTZ Control Keyboard

IV-TKB42AT



Features:

- . LCD display
- . Maximum sub-control:16
- . Key-press warning on/off function
- . Keyboard operation password on/off/lock function
- . Speed dome camera infinitely variable speed control
- . Refurbish the firmware program on line
- . Display the current control address's agreement and baudrate real time
- . Good communication compatibility, built-in many kinds of agreements
- . RS485 control bus, control 255 front end address and connect 128 devices in parallel simultaneously at the most
- . All input and output communication port use anti-radar design, powerful anti-jamming performance, the standard transmitting distance is 1200 meters

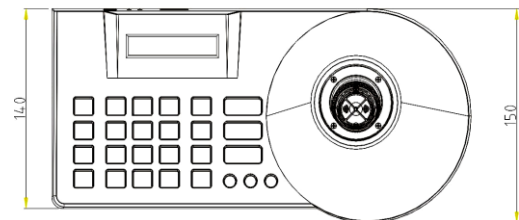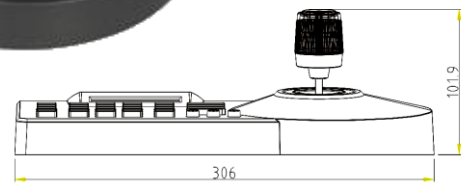

Specification	IV-TKB42AT
Protocol	Pelco-d, Pelco-d, Panasonic, Hikvision etc.
Baud rate (bps)	1200, 2400, 4800, 9600, 19200
Control Address	Control 255 dome camera, decoder at the most, address code:0-254
Communication Mode	RS485 half-duplex
Cascade connection number	16 sub-control at most, controller ID:0-15
Joystick	3D (control: up, down, left, right, zoom)
Interface Mode	5PIN pressing line port
Menu and Key-press	English
Warning Tone	Key-touch beep on/off
Power Supply	DC 12V±10%
Power Consumption	6W MAX
Working Temperature	32°F -122°F (0°C-50°C)
Store Temperature	-4°F -158°F(-20-70°C)
Dimension	16.54" x 10.24" x 6.69" (420X260X170mm)
Weight	2.87 lbs