



2MP, 10X IP PTZ Camera


IV-IPPTZ2MP-10X

Features:

- . 2MegaPixels, 1/2.8" CMOS, 10X optical zoom; Resolution: 1920 x 1080
- . Support TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, UPnP Protocols
- . Support lightning protection, anti-surge, anti-surge function
- . 6PCS high-power infrared lights, no flashlight effect , IR distance 120~180 ft
- . 360°endless pan range and 0°- 90°tilt range, support auto-flip, non-surveillance blind area
- . Max. pan preset speed of 200°/s and max. tilt preset speed of 30°/s
- . Pan keyboard speed 0.6°~180°/s, tilt keyboard speed 3.5°~30°/s
- . Support 220 presets, support 8 patrols, each patrol can contain up to 32 presets
- . Support 4 patterns, can totally record up to 10 minus
- . Support scan between two presets, area limited
- . Support Proportional zoom function, rotation speed can be adjusted automatically according to zoom multiples
- . Support park action, presets/pattern/patrol/pan scan can invoke automatically after a defined time of inactivity
- . Outside weather-proof, IP66, wall mount included



Structure Dimension (Unit: mm):

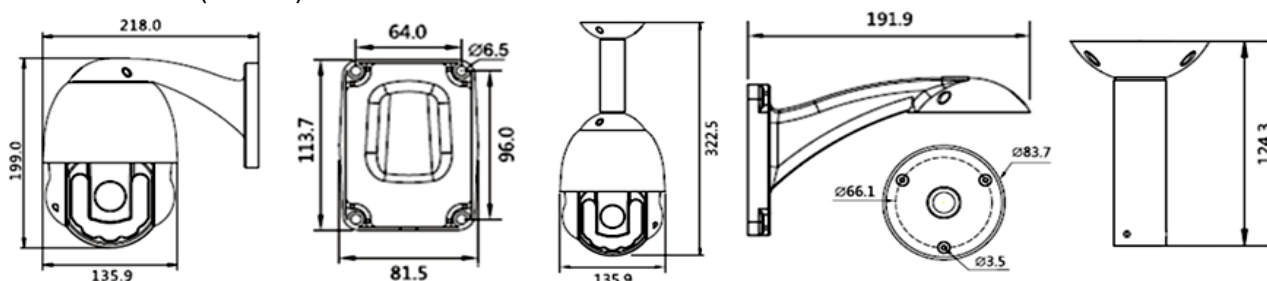

Specification.		IV-IPPTZ2MP-10X
Camera Characteristics		
Video	Sensor	1/2.8"Ex-view 2 Mega Pixel CMOS
	Resolution	1920X1080
	Illumination	Color: 0.2Lux@F1.2 Black: 0.02Lux@F1.2
	Shutter	Auto/manual (1/5~1/50000S)
Code	Video Compression	H.264/Mjpeg
	Output rate	32Kbps-16Mbps, support main stream and sub-stream
	Frame rate	25fps(1280*720)
Lens	Focus	4.9-49mm
	Optical zoom	10X
	View angle FOV(H)	53.2°-5.65° (wide-angle lens)
	Min distance	10mm(W)-1000mm(T)
Function	White balance	Auto/manual
	Mirror Image	Pan/tilt/pan+Tilt/off
	Day/night cut	Auto/manual
PTZ Characteristics		
IR distance	120~180 ft	
Pan range and speed	360° endless, 0.6°-200°/s	
Tilt range and speed	0-90°, support auto flip, 3.5-30°/s	
Manual speed	high.middle.low speed adjustable	
Port		
Network	RJ45 10/100M self-adaption Ethernet interface	
Power supply	DC 12V/2A	
Others		
Power Consumption	20 (MAX)	
Working Temperature/Humidity	-4 °F~140°F (-20 °C~60 °C), ≤90%RH (frostless)	
Ingress Protection	IP66	
Dimensions	8.86" x 9.65" x 9.06"	
Weight	4.76 lbs	