

IV-8CHPOENVREU-CA


H.265 1 HDDs 4K NVR | 8CH 8PoE



Main Feature:

- 8-channel input
- Plug & Play with 8 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- Up to 8 Megapixels resolution recording
- Support H.265/H.264 video formats
- Accurate retrieval, instant playback
- 1 SATA HDD up to 8 TB
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access

Physical Interfaces:

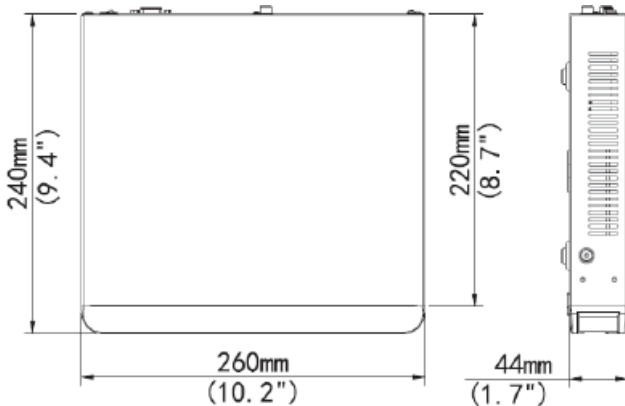

Specification:

Model	IV-4CHPOENVREU-CA
Video/Audio Input	
IP Video Input	8CH
2-way Audio Input	1CH, RCA
Network	
Incoming Bandwidth	60Mbps
Outgoing Bandwidth	64Mbps
Remote Users	128
Video/Audio Output	
HDMI/VGA Output	HDMI: 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz
Recording Resolution	8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P / D1 / 2CIF / CIF
Audio Output	1CH, RCA
Synchronous Playback	8CH
Decoding	
Compression	H.265/H.264
Live view /Playback	8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P / D1 / 2CIF / CIF
Capability	1 x 4K@30, 2 x 4MP@30, 4 x 1080p@30, 8 x 720p@30, 16 x D1
Hard Disk	
SATA	1 SATA interface
Capacity	up to 8TB for each disk
External Interface	
Network Interface	1 RJ-45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel : 2 x USB2.0, Front panel : 1 x USB2.0
Alarm In / Out	4CH / 1CH
PoE	
Interface	8 independent 100 Mbps PoE network interfaces
Max Power	30W for single port 108W in total (13.5W for each)
Supported Standard	IEEE 802.3at, IEEE 802.3af
General	
Power Supply	52V DC
Consumption	≤ 5 W(without HDD)
Working Temperature	-10°C ~ +55°C (+14°F ~ +131°F)
Working Humidity	10% ~ 90%
Dimensions	44 × 260 × 240mm (1.7" × 10.2" × 9.4")
Weight	≤ 1.12 Kg (2.47 lb.) (without HDD)