



# 8CH H.264 PoE Network Video Recorder

## IV-MX8PoENVR

### Features:


- Support HD real-time recording
- 10 ports (8 cameras, one internet, one LAN)
- Standalone Linux embedded system
- Web-based management
- Support up to 8 PoE network cameras
- Support P2P remote access
- Support iCMS system
- Auto system management
- Support touch monitor
- QR code quick access



Free App for iOS / Android



### P2P connection solution

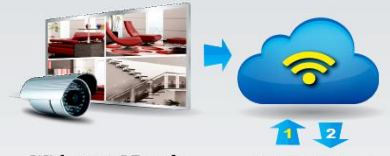

With easy QR code settings, you can monitor with smart phones and tablets over the internet from anywhere, anytime.

Specification		IV-MX8PoENVR
<b>Camera Input</b>		8CH (PoE)
<b>Video</b>	Input	8CH 1080P
	Output	Max. 1920x1080, 1 HDMI with Audio and 1 VGA
<b>Audio</b>	Input	1
	Output	1
<b>Display</b>	Split Screen	1, 4, 8, SEQ.
	Auto Channel Switching	Switching time : 1 ~ 99 sec
	Mode	Zoom ( Digital x2~ x5 ), PIP, Auto SEQ.
<b>Recording</b>	Recording Throughput	1280 * 720 @ 30/25 fps
	(60Hz/50Hz IP Camera)	1920 * 1080 @ 30/25 fps
	Mode	Continuous, Event, Schedule
<b>Playback</b>	Search Mode	Date / Time, Event
	Zoom	*Digital ( x2 ~ x5 )
<b>Network</b>	Network Interface	10/100/1000 Ethernet
	Protocol	TCP/IP, SMTP, HTTP, DHCP, PPPoE (ADSL), NTP, DDNS, FTP, SMTP
	ONVIF	Yes
	Remote Software	iWatch DVR, IE Browser, iCMS
	Account	1 Admin + 10 Users
<b>Backup</b>	Mobile Device System	Windows Phone, iPhone, iPad, Android
	Interface	USB 2.0
	Audio Backup	Yes
<b>Alarm</b>	Backup Type	Network, Ext. USB flash device , SATA optical DVD..etc
	Event Log	Up to the 10000 events (Sensor, Motion, video Loss, power on, remote login, logout, HDD error, HDD full)
<b>OSD &amp; DVR Control</b>	Multi-Language	Supported
	Touch Panel	Touch Panel LCD Monitor (USB Interface, EETI Chipset Only)
	System Upgrade	USB Flash Drive, iWatch DVR
<b>System</b>	Operating System	Embedded Linux OS
	SATA Devices	Max. 3 x SATA Devices (HDDx2+eSATAx1, HDDx1+Optical Devicex1+eSATAx1)
	External HDD	YES ( eSATA )
	Sensor In (NO, NC) Relay	Sensor-in x 8
	Out	Relay-out x 2
	Serial Interface	RS-485
	USB 2.0 Ports	USB 2.0 x2 , USB 3.0 x1
	Dimension	16.93" x 2.16" x 11.53"
Weight (w/o HDD)	TBA	
Power Rating	AC 110/220V 200W With 48V (PoE)	