




5MP Outdoor Mini Fisheye Dome

IV-D5MP360AE

Features:

- 5 Megapixel
- Fixed Lens with f1.19 mm / F2.0
- Basic WDR (74 dB)
- 15 fps at 2592 x 1944
- 180/360° Fisheye View
- Weatherproof (IP68), Vandal Proof (IK10) and Vibration Proof (EN50155)

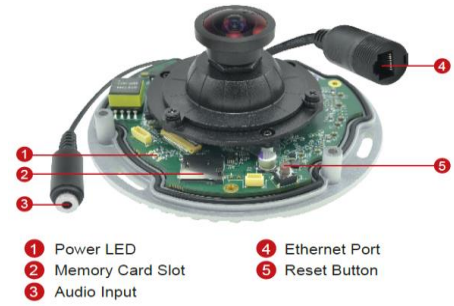

- 1 Power LED
- 2 Memory Card Slot
- 3 Audio Input
- 4 Ethernet Port
- 5 Reset Button

SPECIFICATIONS		IV-D5MP360AE
Device	Device Type	Outdoor Mini Fisheye Dome
	Image Sensor	Progressive Scan CMOS
	Sensor Size	1/3.2"
	Effective Pixels	2592 (H) x 1944 (V) (5.04 MP)
	Horizontal Resolution	1350 TVL
	Day / Night	No
	Low Light Sensitivity	Standard
	Minimum Illumination	Color: 0.1 lux at F2.0 (30 IRE, 2400°K)
	Mechanical IR Cut Filter	No
	IR Sensitivity Range	No
	IR LED	No
	Electronic Shutter	1/5 ~ 1/2,000 sec (manual mode); 1/5 ~ 1/10,000 sec (auto mode)
S/N Ratio	52 dB	
Lens	Focal Length / Aperture	Fixed (Fisheye lens), f1.19 mm / F2.0
	Iris	Fixed iris
	Focus	Fixed focus
	Lens Mount	Board mount
	Horizontal Viewing Angle	180° (overview area), 109.8° (high detail area)
	Viewing Angle Adjustment	Rotation: ±90°
Video	Compression	H.264 (Baseline/ Main/ High profile), MJPEG
	Max. Resolution vs. Frame Rate	15 fps at 2592 x 1944; 15 fps at 2048 x 1536; 15 fps at 1440 x 1080; 15 fps at 1280 x 960; 15 fps at 640 x 480; 15 fps at 320 x 240
	Mode	Fisheye Streaming; Dewarped Streaming: 180° /360° Panorama; ePTZ
	Multi-Streaming	Simultaneous dual streams based on two configurations
	Bit Rate	28 Kbps - 6 Mbps (per stream)
	Bit Rate Mode	Constant, Variable
	Image Enhancement	Basic WDR (74 dB); White balance: automatic, hold, and manual; Brightness; Contrast; Sharpness (auto); Auto gain control; Digital noise reduction; Flickerless
	Privacy Mask	4 configurable regions
	Text Overlay	User defined text on video
Image Orientation	Image flip and mirror	
Audio	Audio Input	Mic-in and line-in, cable with 3.5mm phone jack
Network	Protocol & Service	TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, IPv6, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP, UPnP, SNMP, Bonjour
	Ethernet Port	1, Ethernet (10/100 Base-T), RJ-45 connector
	Security	IP address filtering; HTTPS encryption; Password protected user levels; Anonymous login; IEEE 802.1X network access control
Alarm	Alarm Trigger	Video motion detection (3 regions)
	Alarm Response	Notify control center; Change camera settings; Command other devices; E-mail notification with snapshots; Save video or snapshot to local storage; Upload video or snapshot to FTP
General	Local Storage	MicroSDHC/MicroSDXC memory card slot (card not included)
	Power Source / Consumption	PoE Class 2 (IEEE802.3af) / 3.36W
	Weight	492 g (1.084 lb)
	Dimensions (Ø x H)	110 mm x 60 mm (4.3" x 2.4")
	Environmental Casing	Weatherproof (IP68 rated); Vandal proof (IK10 rated); Vibration proof (EN50155); Transparent dome cover
	Mount Type	Surface, Gang box

	Starting Temperature	-20°C ~ 50°C (-4°F ~ 122°F)
	Operating Temperature	-20°C ~ 50°C (-4°F ~ 122°F)
	Operating Humidity	10% ~ 85% RH
	Approvals	CE (EN 55022 Class B, EN 55024), FCC (Part15 Subpart B Class B), IK10, IP68, NEMA 4X, EN50155
Integration	Unified Solution	Fully compatible with ACTi software
	ISV Integration	Software Development Kit (SDK) available ; ONVIF compliant
	Firmware Access Browser	Microsoft Internet Explorer 8.0 or newer (full functionality);
		Safari with QuickTime installed, and other browsers with VLC installed (partial functionality)
	Auto Firmware Upgrade	Yes
GPS Position	Manual Setting	

IDView Technologies • 12000 Ford Rd. Suite 110 • Dallas, TX 75234 • www.digitalidview.com