




5MP Fisheye Camera

IV-SN5MP360FE

Features:

- . 1/2.5" Progressive Scan CMOS
- . 5MP Resolution, 2560 x 1920
- . Unique De-warping Image
- . Support Software De-warping
- . Low bitrate ,Excellent low light performance
- . 3D DNR,WDR,ICR,HLC
- . Smart IR Up to 30ft (10m)

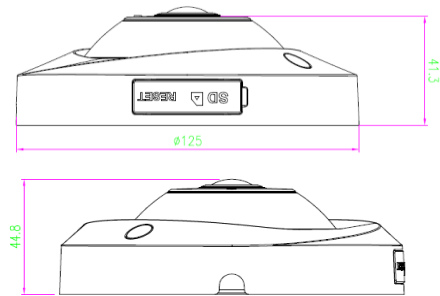

Specification	IV-SN5MP360FE
CAMERA	
Image Sensor	1/2.5" Progressive Scan CMOS
Min. illumination	Color :0.1Lux@(F1.2,AGC ON);B/W: 0 Lux@(IR LED ON)
Day & Night	ICR
Shutter Speed	1/5s~1/20000s
Auto Iris	Fixed
Wide Dynamic Range	True WDR
Digital Noise Reduction	2D/3D
Lens	1.5mm
FOV	360 degrees
IR LED/ IR Range	3pcs / Up to 30ft (10m)
IMAGE	
Video Compression	H.265/H.264/MJPEG
Bit Rate (CBR/VBR)	Main stream:500Kbps-12Mbps ;Sub stream 100Kbps-6Mbps
Audio Compression	G.711_A G711_U,RAW_PCM,NONE
Max. Resolution	2560x1920@25fps
Stream	Stream1 2560x1920, 2048x1536, 1280x960@25fps; Stream 2 1VGA/QVGA@25fps
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
HLC	Yes
9:16 Corridor Mode	N/A
DIS	Support
ROI	Support
Defog	Support
NETWORK	
Network Protocols:	IPv4,802.1x,HTTP,HTTPS,TCP/IP,UDP/IP,RTSP,DHCP,NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ICMP ,IGMP, Unicast and Multicast
Alarm Trigger	Motion detection, Network disconnect, Disk alarm ,I/O alarm
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware Watch Dog
System Compatibility	Onvif
INTERFACE	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Microphone	Yes (Built-in)
Audio I/O	1ch Audio In,1ch Audio Out
Alarm I/O	N/A
RS485 / BNC Output	N/A
Reset Button	Yes
Edge Storage	Micro SD/SDHC/SDXC slot ,Max 128GB
GENERAL	
Power Supply	DC12V/POE
Power Consumption	5W IR LED OFF;8W IR LED ON
Operating Temperature	Starting Temperature: 14°F ~ 122°F (-10°C ~ 50°C); Working Temperature: -4°F ~ 122°F (-20°C ~ 50°C), Humidity: 0% - 90% RH
Ingress Protection	N/A
Approvals	CE / FCC
Product Dimensions	4.92" X 1.76" (φ125x44.8mm)
Product Weight	0.93 LBS. (424g)