

IV-8CHDVR4IP-4K-CA



Key Features

- Support H.265/H.264 video formats
- Support TVI,AHD, CVI,CVBS, IP cameras with adaptive access
- 8-channel BNC input
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920*1080
- Long transmission distance over coax cable


Specifications

Model	IV-8CHDVR4IP-4K-CA	
Video/Audio Input		
Analog Video Input	8-ch, BNC	
IP Video Input	4-ch(only IP up to 12ch),each channel up to 4K	
Supported Analog Camera Types	<p>Support AHD input: 8MP@15fps(channel1-channel2) 5MP@20fps 4MP@30fps 3MP@30fps (channel1 –channel2) 1080P@30fps 720P@60fps</p> <p>Support TVI input: 8MP@15fps(channel1-channel2) 5MP@20fps 4MP@30fps 3MP@20fps (channel1 – channel2) 1080P@30fps 720P@60fps</p> <p>Support CVI input:</p>	

	<p>8MP@15fps(channel1-channel2)</p> <p>5MP@20fps</p> <p>4MP@30fps</p> <p>1080P@30fps</p> <p>720P@30fps</p> <p>Support CVBS input</p>
Audio Input	1-ch, RCA
Two-way Audio	1-ch, RCA
Channel Associated Audio	1-ch,RCA
Network	
Incoming Bandwidth	40Mbps
Outgoing Bandwidth	64Mbps
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE
Video/Audio Output	
CVBS Output	1-ch, BNC
VGA Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
HDMI Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Audio Output	1-ch, RCA
Synchronous Playback	8-ch
Encoding	
Recording Resolution	8MP Lite/5MP Lite/4MP Lite /3MP/1080P/960P/720P/960H/4CIF/CIF
Recording Frame Rate	<p>Main stream:</p> <p>8MP Lite@8fps (channel1-channel2)</p> <p>5MP Lite@12fps</p> <p>4MP Lite@15fps</p> <p>3MP@15fps(channel1 – channel2)</p> <p>2MP@15fps</p> <p>720P@30fps</p> <p>Sub stream:</p> <p>D1@30fps(Max)</p>
Hard Disk	
SATA	1 SATA interfaces
Capacity	Up to 10TB for each HDD
External Interface	

Network Interface	1RJ45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel: 2 x USB2.0
Serial Interface	1 x RS485
General	
Power Supply	12V DC Power Consumption: ≤ 8 W(without HDD)
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH(non-condensing)
Dimensions(W×D×H)	260mm ×240mm× 46mm (10.2" × 9.4"×1.8")
Weight (without HDD)	≤1.1 Kg (4.19lb)

Dimensions

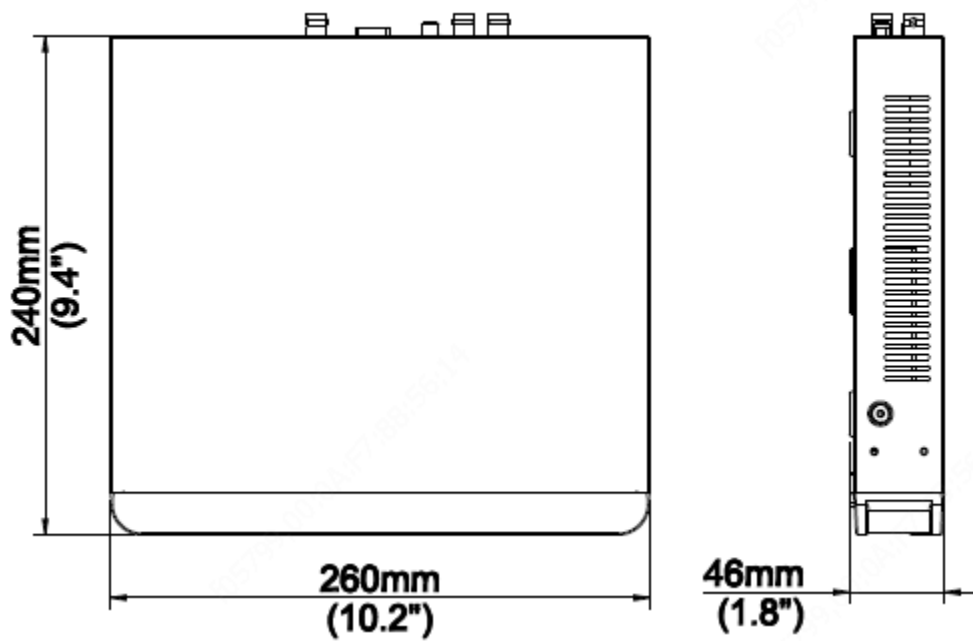

Rear Panel

