





2 MP OWL Vision Low Light Auto Focus IP Dome Camera

IV-OVLLC28122MP-AF

Features:

- 1/1.8" 2Megapixel Sony CMOS
- H.264 & JPEG dual-stream
- 1920(H) x 1080(V)
- Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS
- lens: 2.8~12mm (Auto Focus) / 4X optical zoom
- IP66
- DC 12V/ PoE
- ONVIF Ver. 2.4

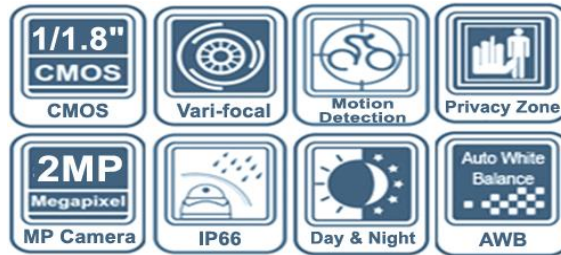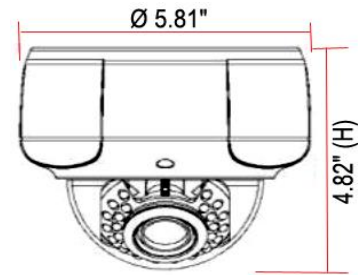

SPECIFICATIONS		IV-OVLLC28122MP-AF	
Camera	Image Sensor	1/1.8" 2Megapixel Sony CMOS	
	Effective Pixels	1920(H) x 1080(V)	
	Scanning System	Progressive	
	Electronic Shutter Speed	Auto/Manual 1/50 ~ 1/10000	
	Min. Illumination	Color: 0.0002 lux /F1.2	
	S/N Ratio	>50dB	
Camera Features	Day/Night	Auto (ICR) / Color / B/W	
	Backlight	BLC	
	White Balance	Auto	
	Gain Control	Auto/Manual	
	Noise Reduction	3D	
	Privacy Masking	Up to 4 areas	
	Slow Shutter	None / Low / Middle / High	
	Motion Detection	22 x 18 areas	
Lens	Focal Length	2.8~12mm (Auto Focus) / 4X optical zoom	
	Max Aperture	F1.2	
	Angle of View	H: 105°(Wide) ~ 30°(Tele)	
	Mount Type	Board-in Type	
Video	Compression	H.265 / H.264 High Profile / JPEG Snapshot	
	Resolution	60Hz Mode: 5M(2592 x 1520) / 3M(2048 x 1520) / 1080P(1920 x 1080)	
	Frame Rate	Main Stream	5M(1~15fps) 3M/1080P(1~30fps)
		Sub Stream	D1/CIF(1~25/30fps)
Bit Rate	H.265 H.264: 30K~16384Kbps		
Network	Ethernet	RJ-45 (10/100Base-T)	
	Protocol	IPv4, HTTP, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Cloud	
	ONVIF	ONVIF Ver. 2.4	
	Max. User Access	5 Users	
	Smart Phone	iPhone, Windows Mobile, BlackBerry, Symbian, Android	
	Browsers	IE, Chrome, Firefox, Safari	
General	Power Supply	DC12V. PoE(802.3af)	
	Power Consumption	<10W	
	Working Environment	Temperature: 14°F ~122°F, Humidity: 10%~90%	
	Ingress Protection	IP66	
	Dimensions	Ø 5.81" x 4.82" (H)	
	Weight	2.65 lbs	