




1080P Network IR Bullet Camera

IV-PBU28122MP

Features

- 1/2.7 " Progressive Scan CMOS
- 1080P@30fps, 2.8~12 mm lens
- Multiple Streams
- IR Range 75-105 ft / 25-35m
- Low bitrate control
- 3D DNR,dWDR,ICR
- Support ROI,Corridormode, HLC

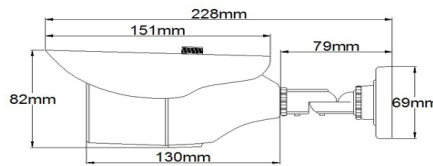

IV-PBK319



IV-PCBK629A

| Specification | | IV-PBU28122MP |
|----------------|-------------------------|--|
| CAMERA | Image Sensor | 1/2.7" Progressive Scan CMOS |
| | Min. illumination | Color 0.2Lux@F1.2 AGC On, B/W: 0 Lux@ IR LED ON |
| | Day & Night | ICR |
| | Shutter Speed | 1/1-1/10000 |
| | Auto Iris | Fixed |
| | Wide Dynamic Range | dWDR |
| | Digital Noise Reduction | 2D/3D |
| | Lens | 2.8~12mm |
| | FOV | 90°-35° |
| | IR LED / IR Range | 24pcs / 75-105 ft (25-35m) |
| IMAGE | Video Compression | H.264 High/Main/Baseline Profile, MJPEG |
| | Bit Rate (CBR/VBR) | Main stream:500kb-12000kb ;Sub stream 100kb-6000kb |
| | Audio Compression | G.711 ,RAW_PCM |
| | Max.Resolution | 1920x1080/30fps |
| | Stream | Stream1 1920x1080/1280x720 Stream 2 D1 to QVGA |
| | Image Setting | Rotate Mode,Saturation,Brightness,Contrast,Sharpness |
| | HLC | Yes |
| | 9:16 Corridor mode | Yes |
| | ROI | Yes |
| | Defog | N/A |
| NETWORK | Network Protocols: | IPv4,802.1x,HTTP,HTTPS,TCP/IP,UDP/IP,RTSP,DHCP,NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ICMP ,IGMP, Unicast and Multicast |
| | Alarm Trigger | Motion Detection,Networkdisconnect,Disk alarm |
| | RTSP Video | Standard RFC2326, Support QuickTime / VLC Player. |
| | Security | User security authentication, Reset, Hardware WatchDog |
| | Web Language | English, Chinese,Polish, Italian, Portuguese, Spanish.(Sunell Brand) |
| | System Compatibility | Onvif |
| INTERFACE | Ethernet | 1 Ethernet (10/100 Base-T) RJ-45 Connector |
| | Audio I/O; Alarm I/O | N/A |
| | RS485/ BNC Output | N/A |
| | Edge Storage | N/A |
| | Reset Button | N/A |
| GENERAL | Power Supply | DC12V/POE |
| | Power Consumption | 2.5W(IR LED OFF) ; 5W (IR LED ON) |
| | Operating Temperature | Starting Temperature: -10°C ~ 50°C (14°F ~ 122°F) / Working Temperature: -20°C ~ 50°C (-4°F ~ 122°F); Operating Humidity: 0% - 90% RH |
| | Ingress Protection | IP66 |
| | Approvals | CE / FCC |
| | Product Dimensions | Φ228*69mm |
| Product Weight | 520g | |