




## 5MP 4 in 1 Indoor / Outdoor IR Bullet

### IV-BV27135MP-FH-DV

#### Features:


- . 5.0MP 4-in-1 camera (HD-TVI/AHD/CVI/CVBS)
- . 5.0MP@TVI/AHD & 4.0MP @ CVI & CVBS video output
- . Varifocal lens 2.7~13.5mm; Motorized
- . 42pcs IR LEDs, IR distance: 115ft
- . Support ICR switch, 2D-DNR, Day/night, D-WDR
- . DC12V/AC24V IP66

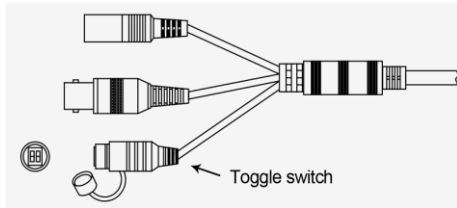

#### Use the toggle switch to select the four video output modes:

Select your video protocol by switching the positions of the toggle switches per the below diagram.

The toggle switches are located at the end of the camera cable



Specification	IV-BV27135MP-FH-DV
Horizontal Resolution	5MP@ TVI/AHD & 4MP@ CVI & CVBS
Image Sensor	1/2.5" CMOS
Effective Pixels	2592 x 1944
Signal System	PAL / NTSC
S/N Ratio	≥50dB (AGC Off)
Min. Illumination	0.1Lux @F1.2 (AGC on) 0 Lux IR LED on
Video Output	TVI /AHD (5MP@25fps, 4MP /3MP/1080P@30fps); CVI (4MP@25fps, 3MP/1080P@30fps); Analog (1280x576, 1280x480)
Lens	Varifocal lens 2.7~13.5mm; Motorized/5x
Day&Night	EXTERN,COLOR, B&W,AUTO
White Balance	Auto
OSD	English / Chinese
UTC	Support
White Balance	Auto/Auto-ext/Preset/Manual
Privacy Mask	Off / 0~15 Zones
IR LED	42pcs IR LED
IR Distance	115ft (35m)
Connector Video	BNC
LED Switch	AUTO
Video Output	TVI / CVI / AHD / CVBS
Power Supply	DC12V/AC24V±10%
Power Consumption	3W (Max. 3.6W with IR cut filter on)
Weight	1.28lbs (580g)
IP Rating	IP66
Working Temperature/Humidity	-4°F ~ 122°F (-20°C ~ 50°C)
Working Humidity	Humidity 90% or less (non-condensing)
Dimension	Ø 4.75" X 3.75" (h)
Weight	1.65 lbs.
Dimensions	Ø5.2" x 3.94" (Ø132mm x 100mm)